ASLE

Slim-Temp Display Case Unit Cooler

Publication No. H113.0e
September, 2000

The ***ASLE*** is the only electric defrost unit cooler on the market that is specifically designed for use in reach-in display cases. This product line offers 6 models which are available in air or electric defrost configurations.

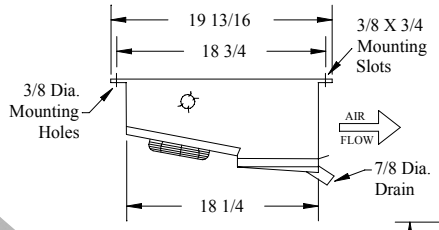

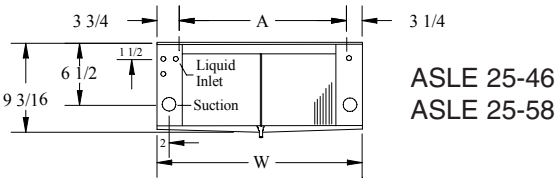

ASLE 25-46
ASLE 25-58

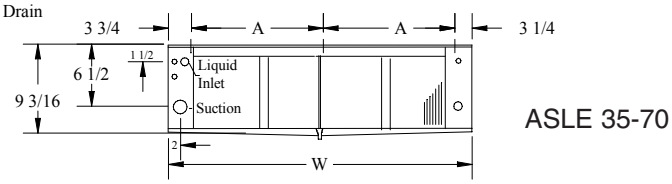

ASLE 35-70

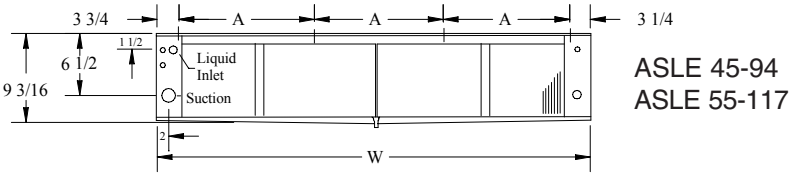

ASLE 45-94
ASLE 55-117

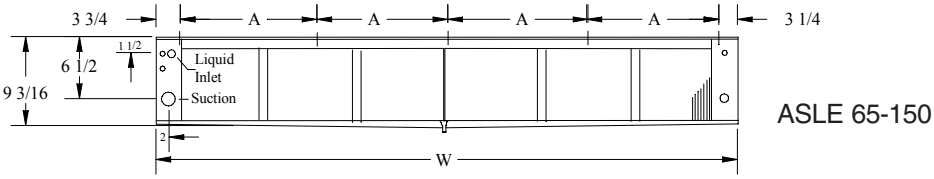

ASLE 65-150

SPECIFICATIONS —Electric Defrost Models

Model Number	BTUH @ 10° TD	Fan Motors	CFM	Motor Amps	Defrost 230/1		Connections		Dimension*		Ship Wt. (Lbs)
				230/1	Watts	Amps	Liquid	Suction	A	W	
ASLE 25-46	4,600	2-16 watt	950	1.1	1,300	5.7	1/2 FN	7/8 ODS	39	46-3/16	83
ASLE 25-58	5,800	2-16 watt	1,000	1.1	1,970	8.6	1/2 FN	7/8 ODS	49	56-3/16	105
ASLE 35-70	7,000	3-16 watt	1,425	1.7	1,850	8.1	1/2 FN	7/8 ODS	31	69-3/16	125
ASLE 45-94	9,400	4-16 watt	1,900	2.2	2,400	10.5	1/2 FN	1-1/8 ODS	28¼	92-3/16	151
ASLE 55-117	11,700	5-16 watt	2,375	2.8	3,000	13.1	1/2 FN	1-1/8 ODS	36	115-3/16	185
ASLE 65-150	15,000	6-16 watt	2,850	3.3	3,500	15.2	1/2 FN	1-1/8 ODS	32¾	138-3/16	222

* All dimensions are in inches.

- All models require externally equalized Thermostatic Expansion valves.
- ASLE capacity ratings at -10°F evaporator temperature.
- All Aluminum low silhouette housing.
- Fan motors are totally enclosed, permanently lubricated and thermally protected.
- Electrical connection made at internal terminal blocks located at end opposite refrigerant connections.
- **UL** & **cUL** listed. **NSF** approved.

Due to continuing product development, specifications subject to change without notice.