


## Reach - In Unit Cooler

Publication No. H116.0  
September, 2000

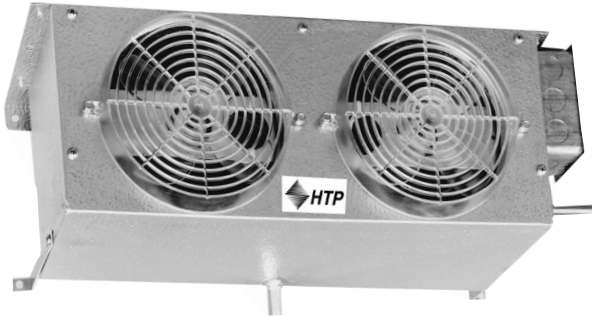

The **T-Temp** model unit cooler is built to mount from the ceiling or wall wherever a compact unit cooler is required.

The versatile **T-Temp** is designed for use in under counter refrigerators, back bars, reach-ins and other applications. The optional thermostatic expansion valve is mounted inside of the unit.

The finned surfaces are protected with RUSS-PROOF II corrosion resistant coating for all units.

### SPECIFICATIONS

MODEL NUMBER	FIG.	CAP. (Btu/hr)		CFM	MOTOR			CONNECTIONS (in.)			DIMENSIONS (in.)			APPRX SHIP WT. (LBS)
		10°F TD	15°F TD		QTY	AMPS 115V	AMPS 230/1	LIQUID	SUCTION	DRAIN	H	W	D	
TT18-8	1	800	1200	200	1	0.73	0.37	1/2 F.N.	3/8 OD	1/2 OD	7-1/4	13-3/4	6	10
TT28-13	2	1300	1950	380	2	1.46	0.73	1/2 F.N.	3/8 OD	1/2 OD	7-1/4	19-1/4	6	15
TT28-17	2	1700	2550	360	2	1.46	0.73	1/2 F.N.	3/8 OD	1/2 OD	7-1/4	19-1/4	6	16

