


## Reach-In Unit Cooler

Publication No. H111.0  
September, 2000

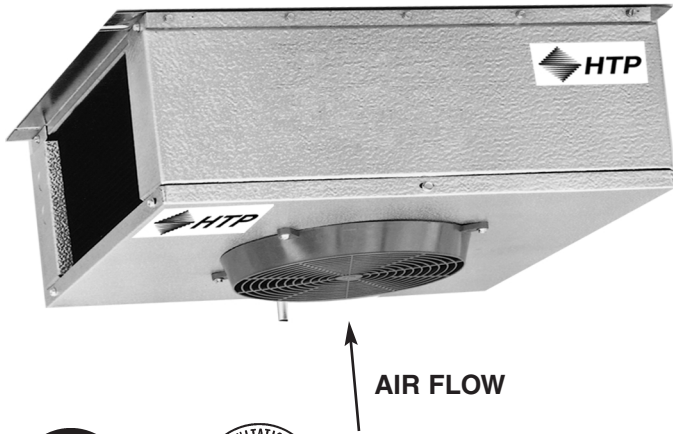

The **Twin-Temp** 2-way Unit Coolers is ideal for reach-in and walk-in applications above 34°F where efficient two-way discharge is required. Designed for easy installation, low maintenance and long life, especially when epoxy coating is applied to coil.

Our specially formulated epoxy coil coating is standard for units TW17-9 through model TW17-35.



MODEL NUMBER	FIG.	CAPACITY (BTU/HR)		FAN DATA		MOTOR DATA		DIMENSIONS (In)						CONNECTION SIZE (In)			SHIP WT. (lbs)
		10° TD	15° TD	CFM	DIAM. (In)	HP	AMPS @ 115V	A	B	C	D	E	F	SUCTION	INLET	DRAIN	
TW 17-9	1	900	1,350	150	8	4 W	.4	18-1/2	16-1/2	7-5/8	5-7/8	12-1/2	19	1/2 MF	1/2 FN	1/2 OD	17
TW 17-12	1	1,200	1,800	190	88	4 W	.4	18-1/2	16-1/2	7-5/8	5-7/8	12-1/2	19	1/2 MF	1/2 FN	1/2 OD	19
TW 17-18	1	1,800	2,700	260	10	9 W	.6	18-1/2	16-1/2	9-1/8	7-3/8	12-1/2	19	1/2 MF	1/2 FN	1/2 OD	23
TW 17-25	1	2,500	3,750	350	10	9 W	.6	20-1/2	18-1/2	9-5/8	7-3/8	15	21	1/2 MF	1/2 FN	1/2 OD	26
TW 17-35	1	3,500	5,250	440	12	9 W	.6	20-1/2	18-1/2	11-1/4	9	15	21	1/2 MF	1/2 FN	1/2 OD	28
TW 17-45	1	4,500	6,750	530	12	1/20	1.7	30-1/2	21-1/4	10	7-3/4	17	32	5/8 OD	1/2 OD	1/2 FPT	44
TW 17-55	1	5,500	8,250	650	12	1/20	1.7	30-1/2	21-1/4	12	9-3/4	17	32	5/8 OD	1/2 OD	1/2 FPT	50
TW 18-65	1	6,500	9,750	820	12	1/20	1.7	30-1/2	21-1/4	12	9-3/4	17	32	5/8 OD	1/2 OD	1/2 FPT	55
TW 17-75	2	7,500	11,250	960	16	1/12	3.5	35-1/4	36-1/4	11	7-3/4	31	36-1/2	5/8 OD	1/2 OD	1/2 FPT	109
TW 18-85	2	8,500	12,750	1100	16	1/12	3.5	35-1/4	36-1/4	11	7-3/4	31	36-1/2	5/8 OD	1/2 OD	1/2 FPT	115
TW 17-105	2	10,500	15,750	1350	16	1/12	3.5	35-1/4	36-1/4	13	9-3/4	31	36-1/2	7/8 OD	5/8 OD	1/2 FPT	121
TW 18-120	2	12,000	18,000	1540	16	1/12	3.5	35-1/4	36-1/4	13	9-3/4	31	36-1/2	7/8 OD	5/8 OD	1/2 FPT	128

- (1) Externally equilized expansion valves must be used on models TW 17-105 and TW 17-120.
- (2) 230V motor amps = 115V amps x .5

