


**HORIZONTAL CONDENSERS**

10000/12000/13000/18000/24000/36000/48000/60000 BTU

## HIGHLIGHTS

- Quiet
- High efficiency
- High quality
- Ideal for rooftop and limited space installations

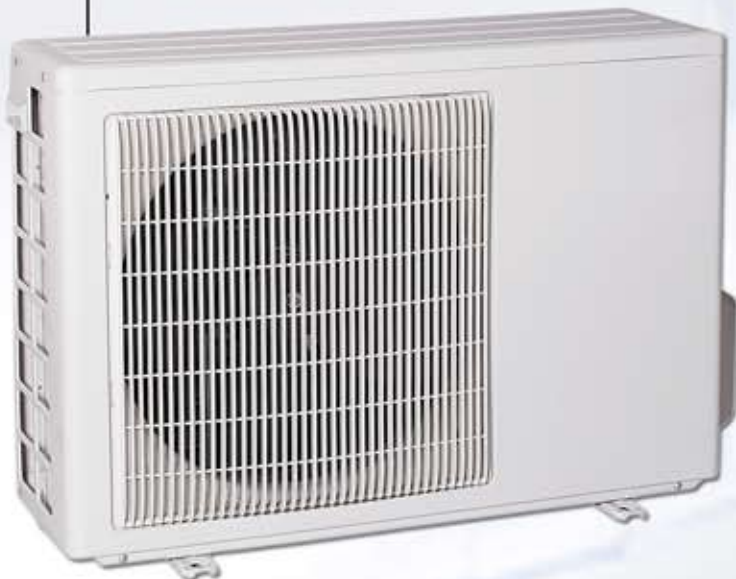

UNITS FROM 10000 TO 24000 BTU



UNITS FROM 36000 TO 60000 BTU

## HORIZONTAL CONDENSERS

10000/12000/13000/18000/24000/36000/48000/60000 BTU

SPECIFICATIONS

MODEL		H10C1MR1	H10C2MR1	H12C1MR2	H12C2MR2	H13C2MR1	H18C2MR1	H24C2PR1	H36C2MP1	H48C2MS1	H48C3MS1	H60C2MS1	H60C3MS1
<b>CAPACITY</b>	Nominal (BTU)	9,500	9,500	12,000	12,000	13,000	18,000	24,000	36,000	48,000	48,000	60,000	60,000
<b>EFFICIENCY</b>	SEER	11.3	11.3	11.3	11.3	11.3	11.3	11.3	11.3	11.3	11.3	11.3	11.3
<b>FAN</b>	Diameter (in)	12"	12"	12"	12"	15"	15"	16"	20"	22"	22"	22"	22"
	CFM	2000	2000	2000	2000	2000	2000	2200	2500	5200	5200	5200	5200
<b>FAN MOTOR</b>	HP	1/25	1/25	1/25	1/25	1/25	1/25	1/6	1/4	1/3	1/3	1/3	1/3
	RPM	940	940	940	940	880	1030	1030	900	1075	1075	1075	1075
	FLA	0.60	0.50	0.30	0.15	0.20	0.50	0.50	1.40	2.10	2.10	2.10	2.10
<b>ELECTRICAL</b>	Voltage-Phase-Hertz	115-1-60	220-1-60	115-1-60	220-1-60						220-3-60	220-1-60	220-3-60
	Range(volts)	187 - 253V											
<b>AMPS</b>	Nominal	8.2	4.7	11.6	6.2	6.2	8.8	11.2	15.6	26.7	18.1	32.8	21.7
	Minimum Circuit	10	6	15	8	8	10	15	20	30	25	40	30
	Fuse Maximum	15	8	20	10	10	15	20	25	35	25	40	30
<b>COMPRESSOR</b>	Type	Rotary						Piston		Scroll			
	RLA	8.1	4.2	11.0	6.0	6.0	8.3	10.7	15.2	24.6	16.0	30.7	19.6
	LRA	40	26	53	25	35	47	56	92	132	97	135	105
<b>REFRIGERANT</b>	Type	R 22											
<b>REFRIGERANT CONNECTIONS</b>	Flare/Sweat	Flare								Sweat			
	Liquid (in)	1/4	1/4	1/4	1/4	1/4	1/4	3/8	3/8	3/8	3/8	3/8	3/8
	Suction (in)	3/8	3/8	1/2	1/2	1/2	1/2	5/8	3/4	7/8	7/8	7/8	7/8
<b>UNIT DIMENSIONS</b>	Height (in)	19"	19"	19"	19"	22"	22"	24"	31"	33"	33"	33"	33"
	Width (in)	23"	23"	23"	23"	28"	28"	33"	35	41"	41"	41"	41"
	Depth (in)	9"	9"	23"	9"	10"	10"	13	16"	19"	19"	19"	19"
<b>NET WEIGHT</b>	(lbs)	62	62	67	67	71	75	100	166	198	198	205	205
<b>CARTON BOX DIMENSIONS</b>	Height (in)	22	22	22	22	24"	24"	27	34	34	34	34	34
	Width (in)	29"	29"	29"	29"	34	34	40	41"	43	43	43	43
	Depth (in)	13"	13"	13"	13"	15"	15"	15"	17"	21	21	21	21
<b>GROSS WEIGHT</b>	(lbs)	66	66	71	71	80	90	106	176	208	208	215	215

- Specifications are subject to change without notice.
- The cooling capacities shown are nominal values based on the standards ARI 210/240: (air Entering) Outdoor unit: 95 °f DB, 75 °f WB, Indoor Unit: 80 °f DB, 67 °F WB. Chosen installation area may affect cooling performance.
- Always consult equipment nameplate for exact electrical requirements.